

Pool light 303, 304

For existing pools

12V~ 300W IP68

For use only when immersed in water. The pool light shall be connected through an isolation transformer 12V 300W.

Pay attention to local electric directions as to the placing of the junction box.

The pool light is mounted on the pool wall with the fittings and the cable underneath the pool coping.

The light must be completely covered with water before lighting.

When exchanging the bulb, the o-ring shall be exchanged as well.

If the external cable or cord of this lighting is damaged, it shall be replaced by a service agent or a similar qualified person.

Follow the instructions stated below for the water quality:


Chlorine content: max 3 mg/l (ppm)
Chloride content: max 150 mg/l
pH-value: 7,2-7,8
Alkalinity: 60-120 mg/l (ppm)
Calcium hardness: 200-1000 mg/l (ppm)



Type 303

Item No: 12290 Pool light

To be mounted on the pool wall

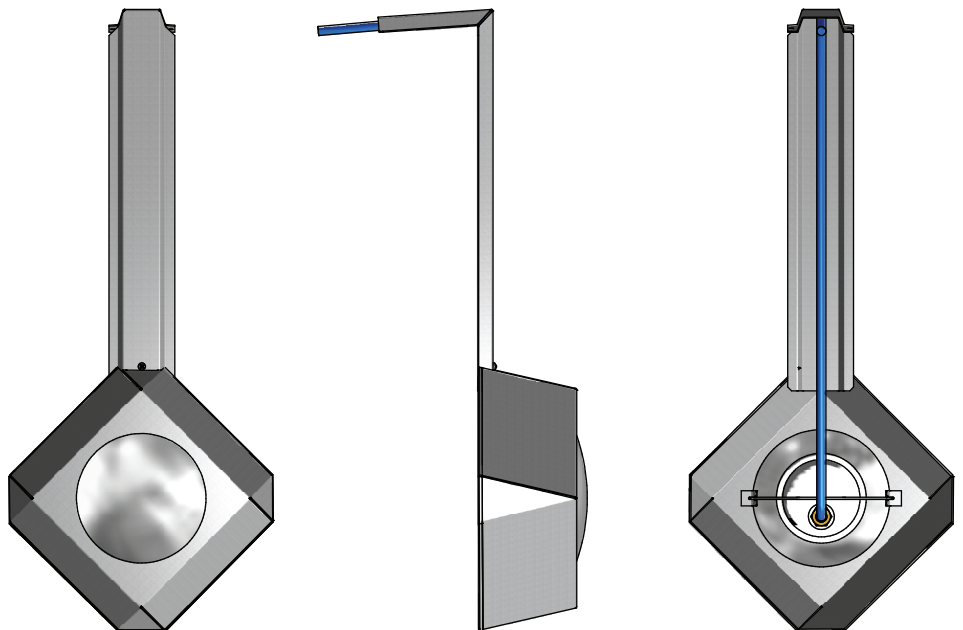

Type 304

Item No: 12280 Pool light

To be mounted in a corner of the pool

