




**MAXI HEAT 18-72kW**

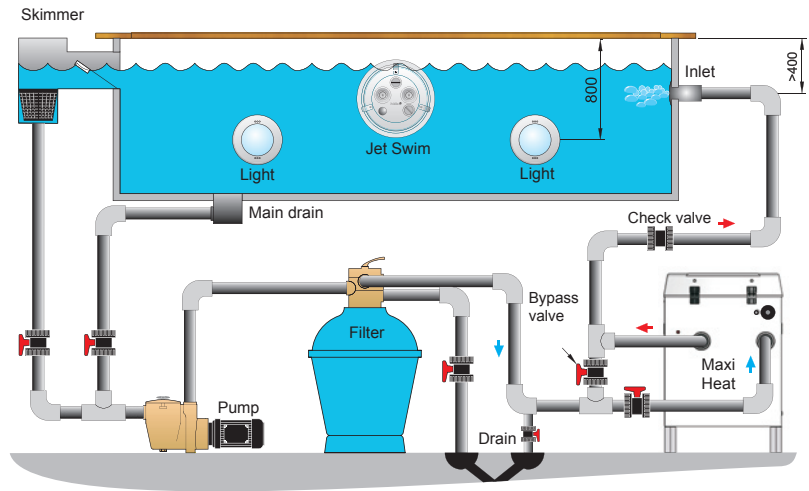


- **Maxi Heat comes with contactors and electronics** - Easy to install.
- **Capacity 18-72kW** - Fast and flexible heating of swimming pools.
- **Two or more heaters can be connected in parallel** - No capacity limitations.
- **Digital control and display** - Easy to set and operate.
- **Maxi Heat is made of powder coated zinc sheet, housing and top cover are made of fibreglass reinforced thermoplastic** - Strong and corrosion resistant.
- **To avoid air pockets the barrel is installed in a horizontal position** - Eliminates air pockets and damaged elements.
- **Heating elements of Incoloy 825 as standard. The heater can be equipped with elements made of titanium** - For increased corrosion protection.
- **Equipped with overheating limit control and flow switch** - Dual safety against overheating and a too low water flow.
- **Dual built-in contactors** - Prevents overheating if one of the contactors fails.
- **Tested and certified by a Notified Body** - Important for product safety.

**Technical data**

Item no.	Capacity kW	400V 3-phase	415V 3-phase
1510018	2x9=18	18kW 26A	19,5kW 27A
1510024	2x12=24	24kW 35A	26kW 36A
1510030	2x15=30	30kW 43A	32kW 45A
1510036	3x12=36	36kW 52A	39kW 54A
1510045	3x15=45	45kW 66A	49kW 68A
1510060	4x15=60	60kW 87A	65kW 90A
1510072	4x18=72	72kW 104A	78kW 108A

Item no.	Capacity kW	230V 3-phase
1510218	2x9=18	18kW 45A
1510224	2x12=24	24kW 60A
1510230	2x15=30	30kW 75A
1510236	3x12=36	36kW 90A
1510245	3x15=45	45kW 113A
1510260	4x15=60	60kW 151A

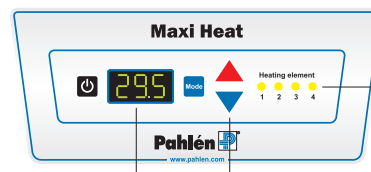


Heating elements in operation. Flashes if element is failing.

Temperature settings.

Actual temperature in pool. / Set temperature.

Maxi Heat is equipped with 2" connections. Minimum flow 170 l/min. Maximum flow 300 l/min. Max pressure: 2 bar.

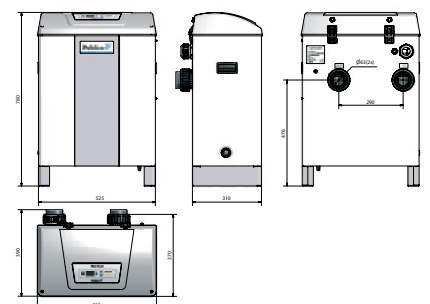

For heaters with titanium element add T after the item no. **Example: Item no. 1510018T.**